SOFTWARE DOCUMENTATION

Adetunji Electronics Online Store

The software and the database behind a single-shop ecommerce site for cables, chargers and phone accessories, paid for by bank transfer and confirmed by hand.

Part A	Software Development
Part B	Database Management
App.	Screens, source listings, verification log

REPOSITORY
kavenlabs/ecommerce-siwes

STACK
TypeScript · React 19 · TanStack Start · node:sqlite

BASELINE COMMIT
e14eaa0 · "scaffold initial ecommerce storefront app"

DATE
October 2026

Contents

FRONT MATTER

— Summary and how this documentation was produced 3

PART A · SOFTWARE DEVELOPMENT

A.1 Introduction: the problem 5

A.2 Requirement analysis 6

A.3 System design 8

A.4 Implementation 12

A.5 Testing 14

A.6 Deployment 16

A.7 Screenshots 18

A.8 Source code listing 25

PART B · DATABASE MANAGEMENT

B.1 The DBMS and why it fits 30

B.2 Database design and ER diagram 31

B.3 Normalization 33

B.4 Queries written 34

B.5 Forms and reports 36

B.6 Automating the shop's record-keeping 36

CLOSING

— Known limitations and recommendations 38

Summary

Adetunji Electronics is a small shop selling chargers, cables, power banks and similar accessories. This project gives it an online storefront: customers browse stock, build a cart, and place an order for delivery or collection. The owner works through a single admin page, adding and pricing products, keeping stock counts and moving each order from *pending* to *confirmed* to *delivered*.

Card payments are deliberately left out. The customer pays by bank transfer after the owner calls to confirm the order, which matches how many small Nigerian retailers already take payment. The software's job is to replace the paper or WhatsApp record of who ordered what: a durable, consistent record of every order, its price at the time of sale, and what that sale did to stock.

The whole system is one Node.js process and one SQLite file. It has no external database server, cloud services or payment gateway. That makes it cheap to run on one small VPS or a machine in the shop, and backing it up means copying one file.

How this documentation was produced

Every claim here was checked against the code in the repository at commit `e14eaa0`. The application was installed with `npm ci`, seeded with `npm run db:seed` and run with `npm run dev`. It was then driven in headless Chromium with Playwright. The schema, queries and code listings are quoted from the source files named next to them.

> **ABOUT THE SAMPLE DATA**
>
> The seed script creates six products and one admin account (`admin@adetunji.shop`, "Shop Owner"). It creates no customers and no orders. To have real records to document, two customer accounts (Chidinma Okafor and Tunde Bakare, both at `example.com`) were registered and three orders placed **through the live user interface** while the screenshots were taken. The owner then confirmed one and marked another delivered. Every order, total and stock figure in this documentation comes from those rows in `data/store.db`.

> **DEFECT FOUND AND FIXED DURING DOCUMENTATION**
>
> The order detail page (`/orders/:id`) never displayed. The file `src/routes/orders.$id.tsx` made it a child of the `/orders` route, which has no `<Outlet />`, so the order list rendered in its place. That included the page a customer is sent to right after checkout. Renaming the file to `orders_.$id.tsx` (TanStack Router's suffix for "same URL, not nested") fixes it, and the public URL is unchanged. See §A.5.

PART A

Software Development

What the software is for, what it has to do, how it is built, and how far it has been tested and deployed.

A.1	Introduction
A.2	Requirement analysis
A.3	System design
A.4	Implementation
A.5	Testing
A.6	Deployment
A.7	Screenshots
A.8	Source code listing

A.1 Introduction: the problem

A small accessories shop usually runs on stock it can see and orders it keeps in its head, a notebook or a WhatsApp chat. That holds up when a handful of customers walk in. It breaks down once orders arrive from people who are not in the shop: it is easy to promise the last 65W charger to two people, to quote yesterday's price, or to lose track of who has paid.

The store described here closes that gap for one shop, Adetunji Electronics, with as little machinery as possible:

- **A public catalogue with live stock.** Every product card shows the count on the shelf (for example "*5 in stock*" for the 65W GaN dual port after one sale). The add-to-cart control will not go above that number.
- **Orders that cannot oversell.** Stock is checked and reduced inside one database transaction at the moment the order is placed (§A.3.3).
- **Payment matched to local practice.** Checkout asks for a phone number, not a card. Orders start as *pending* ("Awaiting payment" to the customer). The order page tells the customer, "You will get a call on 0803 412 7781 with transfer details once it is confirmed." The owner confirms the transfer by hand and moves the order on.
- **Delivery or collection.** The customer chooses delivery to an address (a flat ₦2,000 fee, `DELIVERY_FEE` in `src/lib/orders-data.ts:6`) or free collection from the shop.
- **A record that does not drift.** Each order line copies the product name and price at the moment of sale, so a later price change never rewrites history (§B.3).

The README lists what is out of scope on purpose: card payments, search, coupons, reviews, multiple shops and courier integration. This documentation treats those as deliberate scope limits, not missing features.

A.2 Requirement analysis

A.2.1 Stakeholders

STAKEHOLDER	INTEREST	HOW THE SYSTEM REPRESENTS THEM
Shop owner (admin)	Keep the catalogue, prices and stock right. See every order and record each payment and hand-over.	A `users` row with `is_admin = 1`. Seeded as "Shop Owner", `admin@adetunji.shop`. On an empty database the first account to register becomes admin (`auth-api.ts:55-57`).
Customer	See what is in stock and what it costs, order without a card, and follow the order.	A self-registered `users` row with `is_admin = 0`. Can read only their own orders (`store-actions.ts:31-32`).
Visitor	Browse before committing.	No account. The home page, shop, product pages and cart all work signed out. Checkout redirects to `/login`.
Operator / maintainer	Run, update and back up the shop on one machine.	npm scripts for seeding, password reset, build and serve. All state lives in `data/store.db` and `public/uploads`.

A.2.2 Functional requirements

ID	REQUIREMENT	WHERE IT IS MET
F1	List all products with price and stock; show one product in detail.	`fetchShopProductsFn`, `fetchProductFn` · `routes/shop.tsx`, `routes/products.$id.tsx`
F2	Keep a cart across page loads without an account.	`lib/cart.tsx`, stored in `localStorage["store_cart"]`
F3	Register, sign in and sign out with email and password.	`registerFn`, `loginFn`, `logoutFn` in `auth-api.ts`
F4	Place an order for delivery (address required) or collection, with a phone number.	`placeOrderFn` → `createOrder`
F5	Refuse an order that exceeds stock and reduce stock when an order succeeds.	`createOrder` transaction (`orders-data.ts:23-114`)
F6	Show a customer their own order history and order detail.	`fetchUserOrdersFn`, `fetchOrderDetailFn`
F7	Admin: add, edit and delete products, including an optional image.	`saveProductFn`, `deleteProductFn` in `admin-api.ts`
F8	Admin: see all orders and set each one's status.	`fetchAdminDataFn`, `updateOrderStatusFn`
F9	Operator: reset a password from the command line, which also signs that user out everywhere.	`scripts/set-password.ts`

A.2.3 Non-functional requirements

ID	QUALITY	HOW THE CODE ACHIEVES IT

N1	Price integrity	The browser sends only `productId` and `qty`. Names, prices and totals are read back from the database on the server (`checkout-api.ts:7-14`).
N2	Stock integrity	Duplicate lines are merged before validation. The decrement runs inside `BEGIN…COMMIT` and carries `AND stock >= ?`, so stock cannot go negative.
N3	Money accuracy	Whole naira stored as `INTEGER`, never floating point. `naira()` in `lib/utils.ts` is the only place a price is formatted.
N4	Authentication security	Passwords hashed with scrypt and a per-user 16-byte salt, compared with `timingSafeEqual`. Sessions use 32-byte random tokens in an `httpOnly`, `sameSite=lax` cookie that lasts 30 days. Login gives the same error for an unknown email and a wrong password.
N5	Authorization	Admin rights are checked on the server inside every admin function (`requireAdmin`), not just by hiding UI. Order reads check ownership.
N6	Upload safety	Images under 4 MB. The format is decided by the file's leading bytes (JPG, PNG, WebP or AVIF), and the extension comes from that allowlist, never from the uploaded file name.
N7	Responsiveness	Data routes avoid blocking loaders and use React Query with prefetch-on-hover. The README reports 62–105 ms to content at 250 ms simulated latency. That figure is the authors' measurement and was not re-measured for this documentation.
N8	Deployability	Runs on Node ≥ 22.5 with no external services. A single file holds all state, so a backup is a file copy.
N9	Maintainability	Strict TypeScript. `npm run verify` runs typecheck, oxlint, the oxfmt check and the build. A layered file-naming convention keeps database code out of the client bundle.

A.3 System design

A.3.1 Architecture tiers

The application is a classic three-tier system packed into one process. TanStack Start renders pages on the server and then hydrates them in the browser. Every database call crosses an RPC boundary created with `createServerFn`, so the browser bundle contains only a stub. That boundary is enforced by naming convention: `*-data.ts` files contain SQL and are imported only by `*-api.ts` and `*-actions.ts` files. The connection itself is wrapped in `createServerOnlyFn`, which throws if it is ever reached from client code.

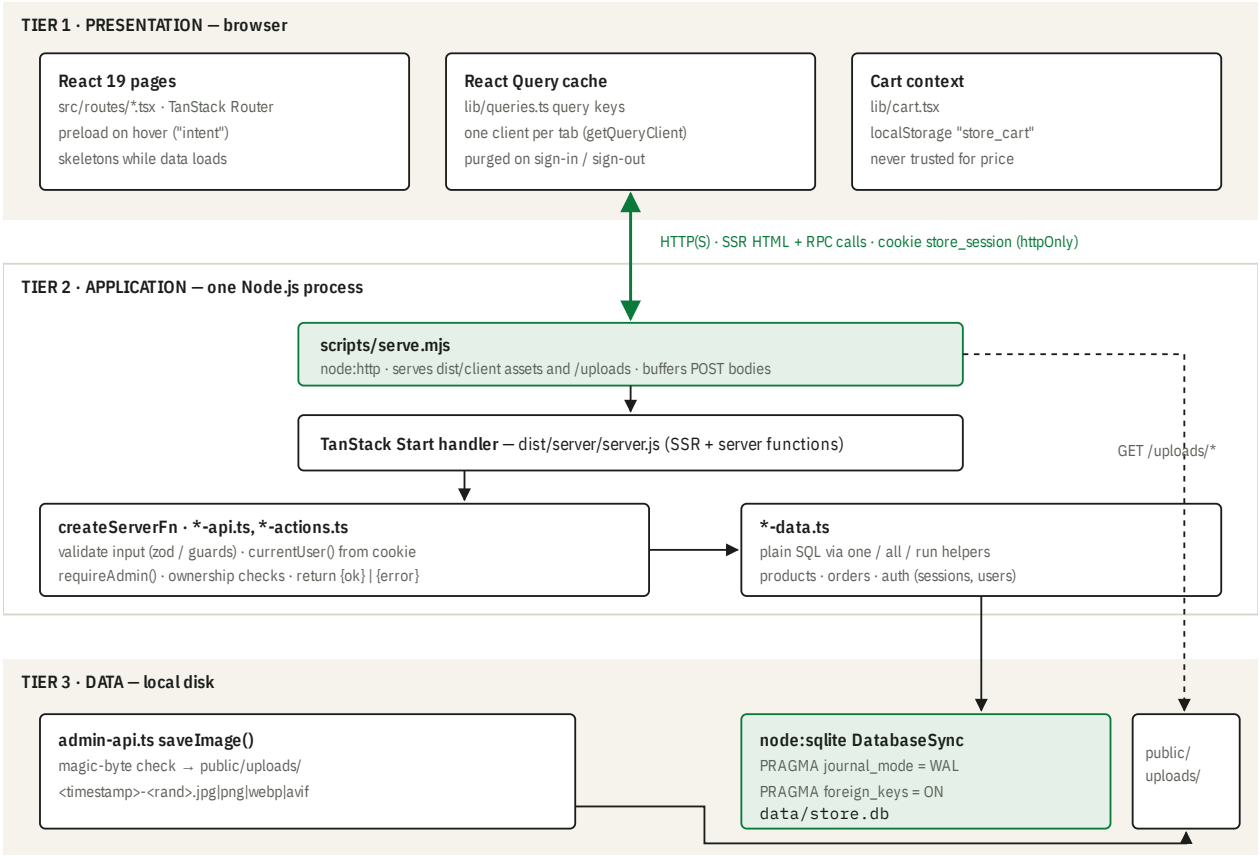


Figure A1. Runtime tiers. Green boxes are the two pieces specific to this deployment shape: the hand-written HTTP server and the embedded SQLite engine. Uploaded images skip the build output and are served straight from `public/uploads`, so a new upload is live without a rebuild.

A.3.2 Use cases

Three actors use the system. A *Customer* is a Visitor who has registered, so they inherit everything a Visitor can do. The *Shop owner* uses the same login form and differs only in the `is_admin` flag, which the server checks on every admin action.

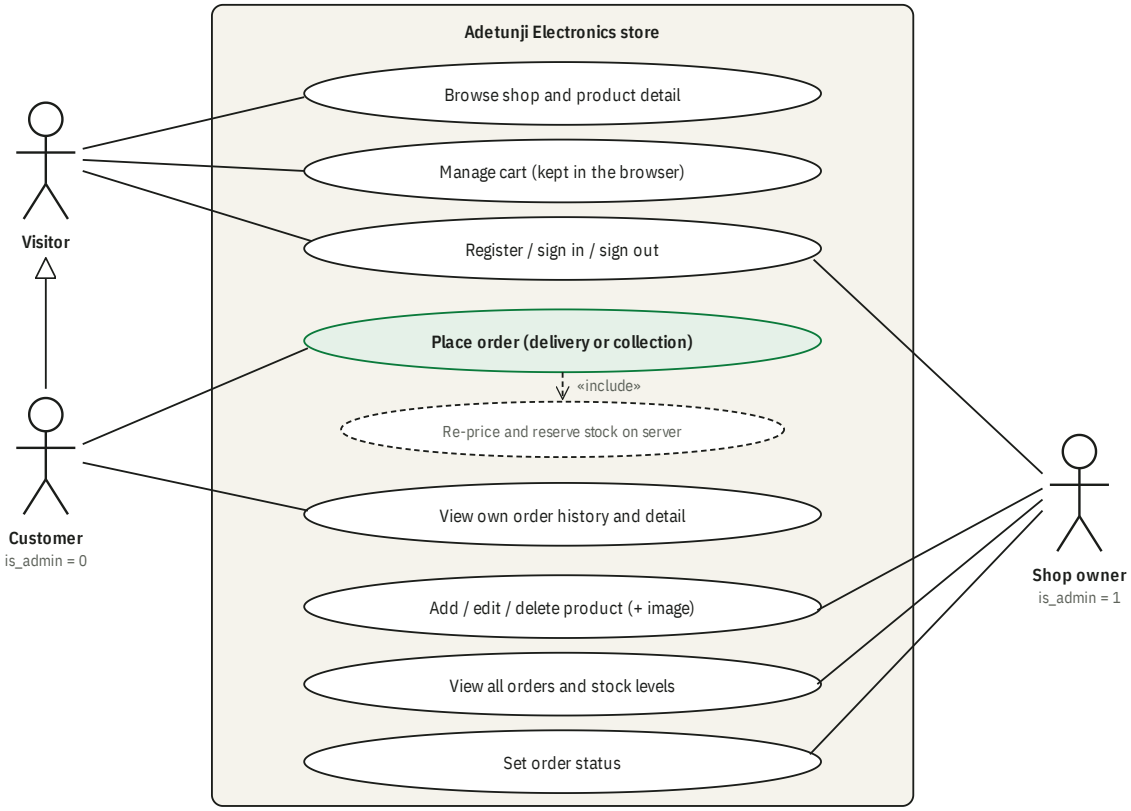


Figure A2. Use-case diagram. The hollow triangle is generalisation: a Customer can do everything a Visitor can. "Place order" always includes server-side re-pricing and the stock check, whatever the browser sent.

A.3.3 Core workflow: placing an order

Placing an order is the one workflow where several things can go wrong at once, and most of the code's care goes into it. The flowchart follows `placeOrderFn` (`checkout-api.ts:27-59`) and `createOrder` (`orders-data.ts:11-115`) branch by branch. Checks made before the transaction return an error straight away. Any failure after `BEGIN` throws, rolls the whole transaction back, and comes back to the form as `{ error }`. Nothing is half-written.

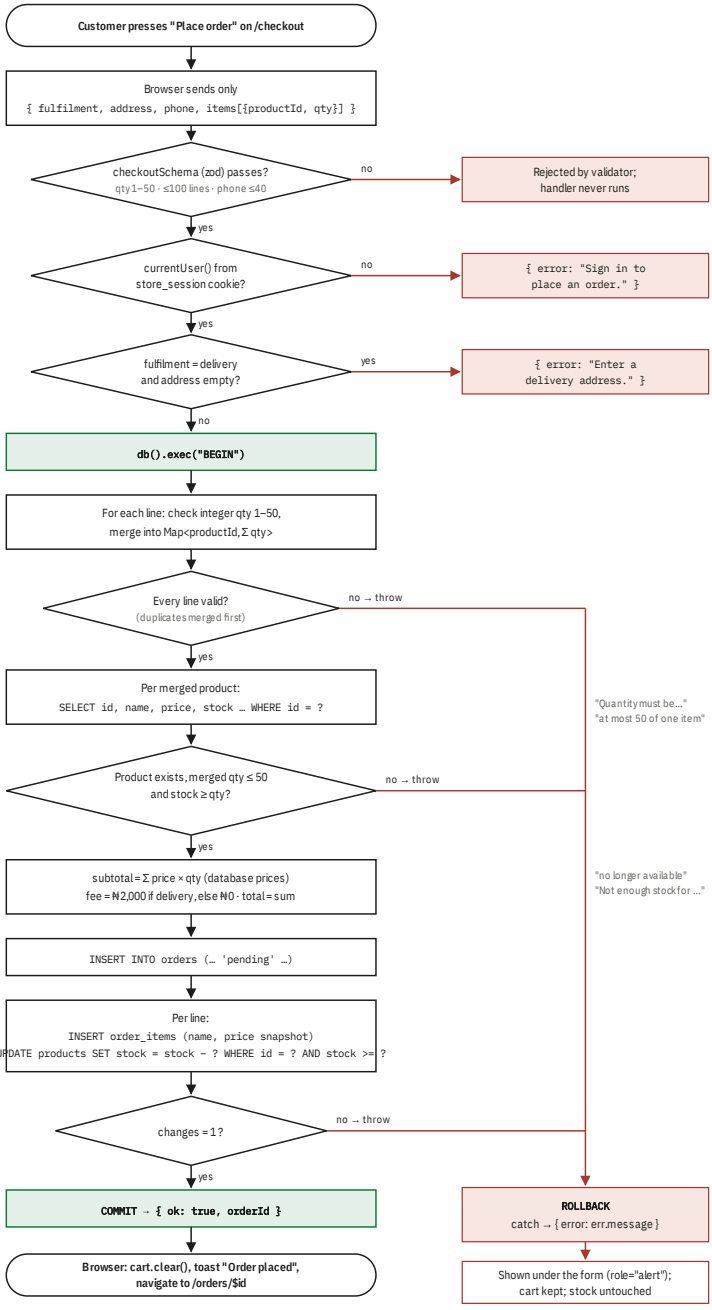


Figure A3. Order placement, following the code's actual branches. The quantity cap is checked twice: once per incoming line, and again after duplicate lines are merged, because three lines of 20 each pass alone but add up to 60. The `AND stock >= ?` guard on the `UPDATE` is a second line of defence at the database, so even a future code path that skips validation cannot push stock below zero.

A.3.4 Order status lifecycle

An order's `status` column takes one of four values. Below is the intended flow, as implied by the labels the UI shows a customer, next to what the code actually enforces.

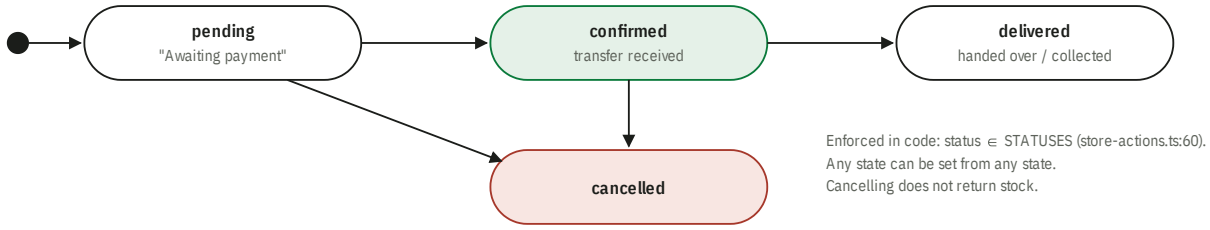


Figure A4. Intended order lifecycle. The admin's status menu lets any of the four values be picked at any time. The server checks only that the value is one of the four, so the arrows show the intended flow, not a rule the code enforces.

A.4 Implementation

Language	TypeScript 7 in strict mode, plus one plain ES module (`scripts/serve.mjs`)
Framework	TanStack Start 1.168 (SSR + server functions) on Vite 8, with TanStack Router 1.170 for file-based routes
UI	React 19, shadcn/ui components on Base UI, Tailwind CSS 4, lucide icons, sonner toasts
Data fetching	TanStack React Query 5, one client per browser tab
Validation	zod 4 at the checkout boundary. Hand-written guards in the admin and auth functions.
Database	`node:sqlite`, built into Node.js. There is no ORM or query builder: queries are hand-written SQL with positional parameters.
Crypto	`node:crypto`: scrypt, randomBytes, timingSafeEqual
Tooling	oxlint, oxfmt, tsc, tsx (scripts), @tanstack/router-cli (route tree generation)

A.4.1 File layering

TanStack Start refuses to bundle server-only modules into the client, and that check is transitive. The code therefore follows a strict layering, which the README documents and the source follows:

LAYER	FILES	RULE
Routes / components	`src/routes/*.tsx`, `src/components`	Never import `*-data.ts`. They call server functions or use React Query options.
RPC boundary	`*-api.ts`, `*-actions.ts`	Each export is a `createServerFn`. Its body is stripped from the client bundle.
Data access	`products-data.ts`, `orders-data.ts`, `auth-data.ts`, `session-data.ts`	The only files with SQL or cookies.
Connection	`lib/db/client.ts`	Wrapped in `createServerOnlyFn`: it throws if reached from the client. It applies the schema on first connect.
Shared types	`lib/types.ts`	Plain interfaces, safe to import on either side.

A.4.2 Representative code: the checkout boundary

This is the whole checkout server function. The zod schema validates the request for real, because TypeScript types disappear at the network boundary. The handler then adds the checks zod cannot express: a session must exist, and delivery needs an address. Errors are *returned* rather than thrown, and redirects are left to the caller. The source comment explains why: a redirect thrown inside a server function was serialised to the browser but never applied, so the customer stayed on `/checkout`.

SRC/LIB/CHECKOUT-API.TS · LINES 15–59

```
const lineSchema = z.object({
  productId: z.number().int().positive(),
  qty: z.number().int().min(1).max(50),
```

```
const checkoutSchema = z.object({
  fulfilment: z.enum(["delivery", "pickup"]),
  address: z.string().trim().max(500).default(""),
  phone: z.string().trim().min(1).max(40),
  items: z.array(lineSchema).min(1).max(100),
});

exportconst placeOrderFn = createServerFn({ method: "POST" })
  .validator(checkoutSchema)
  .handler(async ({ data }) => {
    const user = currentUser();
    if (!user) return { error: "Sign in to place an order."asconst };

    const address = data.address.trim();
    if (data.fulfilment === "delivery" && !address) {
      return { error: "Enter a delivery address."asconst };
    }

    letorderId: number;
    try {
      orderId = createOrder({
        userId: user.id,
        fulfilment: data.fulfilment,
        address: data.fulfilment === "delivery" ? address : null,
        phone: data.phone,
        items: data.items,
      });
    } catch (err) {
      // Stock and quantity failures are raised inside the transaction.const message = err
instanceofError ? err.message : "Could not place the order.";
      return { error: message };
    }

    return { ok: trueasconst, orderId };
  });
```

In the browser, `routes/checkout.tsx` builds the request from cart lines, keeping only `productId` and `qty` (*"Only ids and quantities are sent. The server owns pricing."*). On success it clears the cart and navigates to the order page.

A.4.3 Other implementation decisions worth noting

- **Session lookup and cleanup.** `userForToken` joins `sessions` to `users` and checks expiry on every read. On roughly every 100th read it also deletes expired sessions, so a token that is never presented again does not linger forever, and no cron job is needed.
- **Schema in TypeScript.** The DDL lives in a string in `lib/db/schema.ts`, not a `.sql` file, because reading a `.sql` file with `fs` broke in production (it was not copied into `dist/`). Every statement is `CREATE … IF NOT EXISTS` and runs on each connection.
- **No route loaders for data.** Pages fetch with `useQuery` and show skeletons, so navigation never waits on a server round trip. Only access control (`beforeLoad` on `/admin`, `/checkout`, `/orders`) blocks.
- **One query client per request or tab.** `getQueryClient()` returns a fresh client on the server. A shared module-level client would leak one visitor's cached session to the next.

A.5 Testing

> **HONEST STATUS**
>
> The repository has **no automated tests**: no `*.test.*` or `*.spec.*` files, no test runner (Vitest, Jest or Playwright Test) in `package.json`, no `test` script and no CI workflow. Everything below was either static checking or a manual or scripted run against the live app while preparing this documentation.

A.5.1 What does exist: static verification

`npm run verify` chains four checks. Each was run on the code as fixed in this documentation:

CHECK	COMMAND	RESULT
Type checking	`tsc --noEmit`	Pass, no errors
Lint	`oxlint src scripts`	Pass, no findings
Formatting	`oxfmt --check .`	Pass ("All matched files use the correct format", 59 files)
Production build	`vite build`	Pass. Client and SSR bundles emitted (`dist/server/server.js` 80 kB)

A.5.2 Behaviour exercised against the running app

These were driven through the real UI with Playwright (headless Chromium, 1280 × 820) and confirmed by reading the database afterwards.

SCENARIO	EXPECTED	OBSERVED
Signed-out visitor opens `/admin`, `/orders`	Redirected	Pass. HTTP 307. `/admin` sends the browser to `/`.
Register two customers, place three orders (one delivery, two collection)	Orders stored with server-computed totals	Pass. Order #1 ₦54,000 + ₦2,000 = ₦56,000. #2 ₦12,500. #3 ₦60,500.
Stock reduced exactly by quantities ordered	e.g. USB-C cable 22 → 20, lightning cable 30 → 27	Pass, all six products reconcile with the seed values
Stored subtotal equals Σ(price × qty) of its lines	Equal for every order	Pass (query in §B.4, Q10)
Admin changes status (pending → confirmed, pending → delivered)	Customer sees the new badge	Pass. Order #1 shows "Confirmed" to Chidinma.
Customer B opens Customer A's order URL	Refused	Pass. Tunde sees "We could not find that page", with no address or totals leaked.
Customer opens `/orders/1` (own order)	Order detail page	**Fail before fix:** the order list rendered instead. Pass after the route fix (below).

`npm run build` then `scripts/serve.mjs`	Starts, verifies manifest, serves	Pass. "asset manifest ok (33 files referenced)". `/`, `/shop`, `/products/1`, `/login` return 200.

A.5.3 Defect found: order detail route never rendered

In TanStack Router's file naming, `orders.$id.tsx` is a *child* of `orders.tsx`. The generated route tree had `getParentRoute: () => OrdersRoute`. A child renders inside its parent's `<Outlet />`, and `routes/orders.tsx` has none, so visiting `/orders/1` showed the order list. The same happened to the page `checkout.tsx` navigates to after every successful order, so a customer never saw the "Next step: you will get a call" panel.

The fix renames the file to `orders_.$id.tsx`. The trailing underscore tells the router to keep the URL `/orders/$id` but attach the route to the root. The `createFileRoute` id was updated to match and the route tree regenerated. No links had to change.

A.5.4 Not tested, and worth testing first

- **Concurrent checkouts for the last unit.** The transaction design is sound by inspection, but nothing exercises it.
- **The oversell paths:** duplicate lines adding up to more than 50, quantity above stock, a product deleted mid-cart.
- **Image upload validation:** polyglot files, more than 4 MB, a wrong extension on valid bytes.
- **Session expiry and the probabilistic sweep,** and `set-password.ts` signing out existing sessions.
- **Non-admin calls to admin server functions** made directly, not through the UI.

Most of `createOrder` and `auth-data.ts` could be unit-tested with Node's built-in test runner against a temporary `DATA_DIR`, without adding a framework.

A.6 Deployment

The app targets one machine with a persistent disk, such as a VPS or a computer in the shop. It is not suitable for serverless hosting, because the database is a local file. Everything below comes from `package.json`, `scripts/`, `.env.example` and the README.

A.6.1 Commands

```
# one-time setup on the server (Node 22.5 or newer)
npm ci
npm run db:seed                        # creates data/store.db, 6 products, admin account
npm run user:password -- admin@adetunji.shop 'a-long-unique-password'

# release
npm run build                          # vite build → dist/client + dist/server/server.js
PORT=3000 HOST=0.0.0.0 npm run serve   # node scripts/serve.mjs, run under pm2/systemd
# or both in one step:
npm run deploy                         # = npm run build && npm run serve
```

A.6.2 Configuration

VARIABLE	DEFAULT	USED BY
`DATA_DIR`	`./data`	`lib/db/client.ts`, resolved against the working directory. Holds `store.db`.
`PORT` / `HOST`	`3000` / `0.0.0.0`	`scripts/serve.mjs`
`ADMIN_EMAIL` / `ADMIN_PASSWORD`	`admin@adetunji.shop` / `changeme123`	`scripts/seed.ts` only, on first seed

A.6.3 Why a custom server

`vite build` for TanStack Start produces a fetch handler, not a listening server, and `vite preview` does not run it. `scripts/serve.mjs` fills that gap. It mounts the handler on `node:http` and serves static assets with long-lived caching for hashed files. It serves `/uploads/*` from the real `public/uploads` directory, with a path-traversal guard, and buffers request bodies so server-function POSTs arrive intact. At startup it renders `/` and refuses to run if any referenced asset is missing on disk, which catches the case where the server was not restarted after a rebuild.

A.6.4 HTTPS, testing over the internet, and backup

- Terminate TLS at a reverse proxy in front of `serve.mjs`.
- For a quick test from a phone, the README uses a Cloudflare quick tunnel: `cloudflared tunnel --url http://localhost:3002`.
- **Backup:** copy `data/store.db`. With WAL mode enabled, copy while the server is stopped, or use SQLite's online backup, so the `-wal` file is included. Uploaded images in `public/uploads` also need copying. The README says *"Nothing else is stateful"*, which leaves those images out.

README AND CODE DISAGREE

The README says the session cookie "is not marked `secure`". The code (`session-data.ts:21`) sets `secure: process.env.NODE_ENV === "production"`, and the production bundle compiles this to `secure: true` (checked in `dist/server`). In practice a production build needs HTTPS for sign-in to work, except on `localhost`, which browsers treat as secure. Serving the build over plain HTTP on a LAN address would silently drop the cookie.

A.7 Screenshots

All screens were captured from the running application at `http://localhost:3000` with the seeded catalogue and the orders described in the Summary. The seed sets no product images, so the cards show the app's own "No image" placeholder.

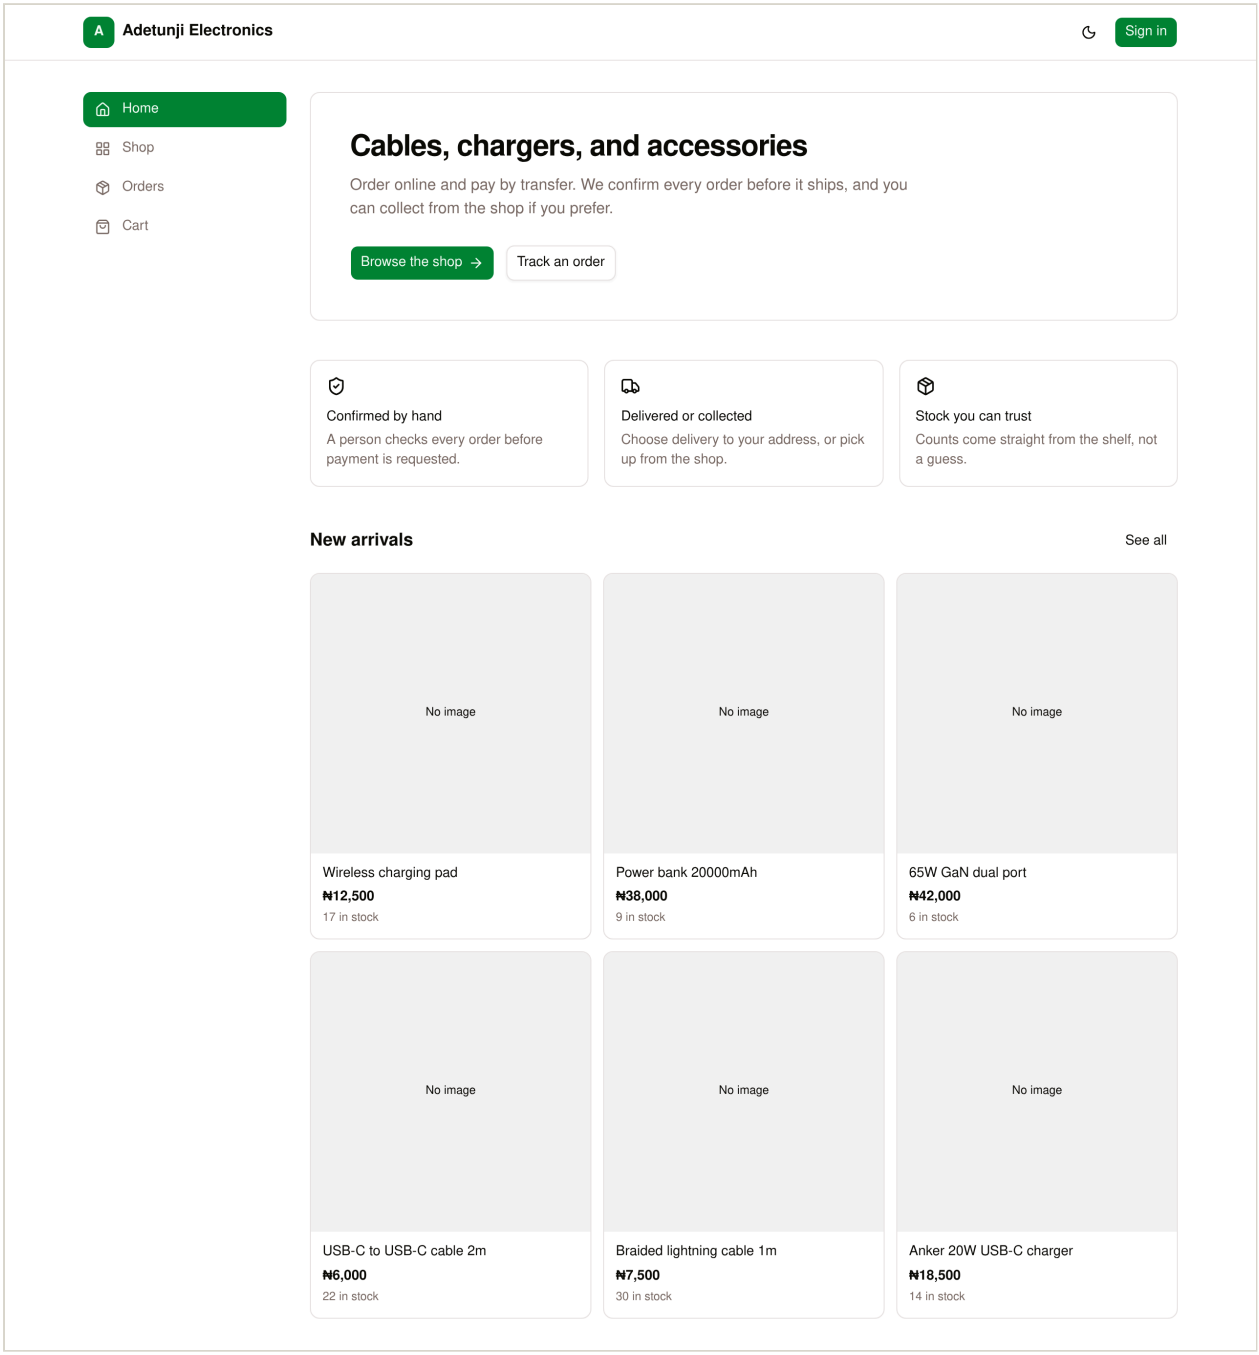


Figure A5. Home (`/`), signed out. A hero with links to the shop and order tracking, three promises ("Confirmed by hand", "Delivered or collected", "Stock you can trust"), and the six newest products.

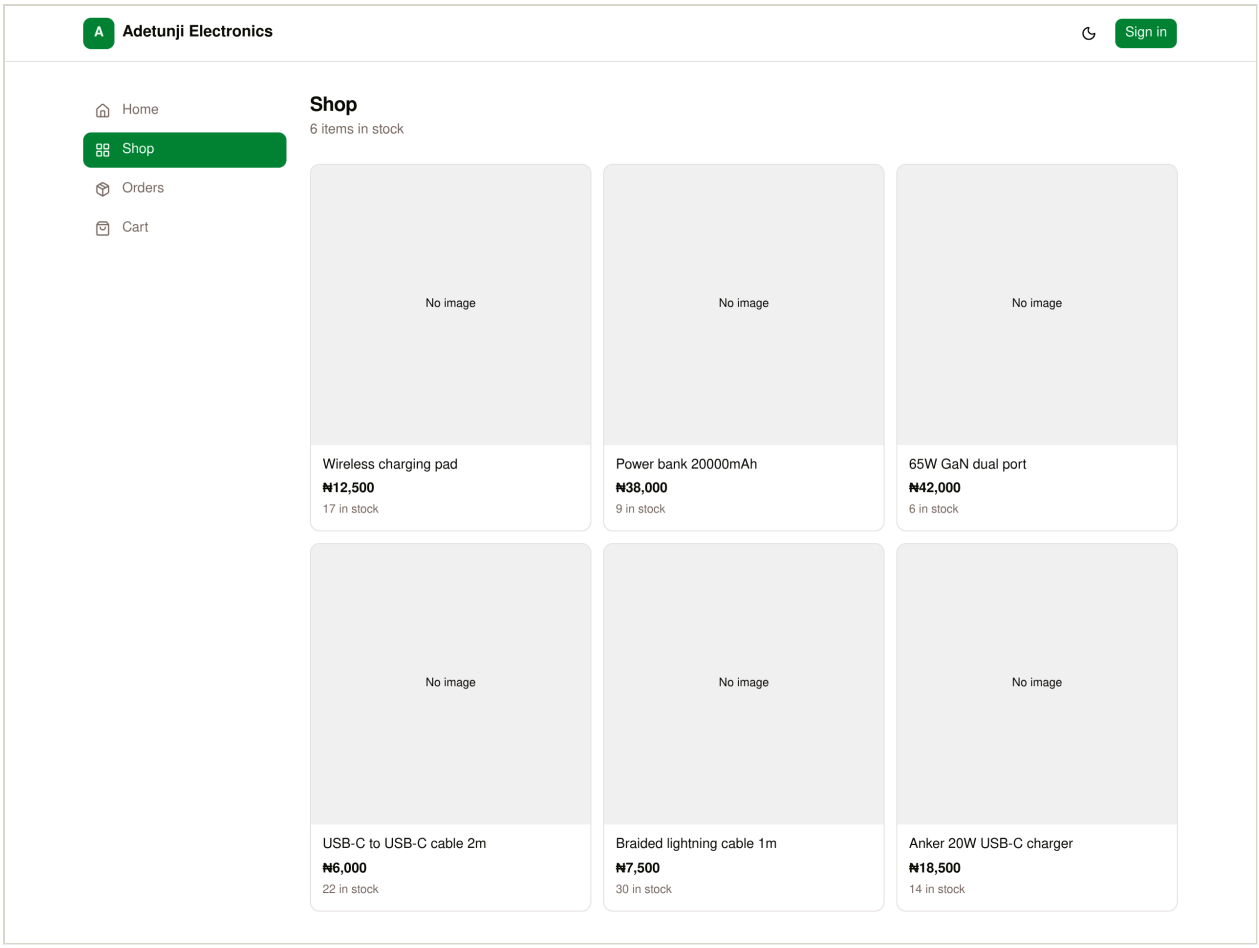


Figure A6. Shop (`/shop`). The full catalogue, newest first (`ORDER BY id DESC`), with price and live stock. This was captured before any orders, so it shows the seeded counts.

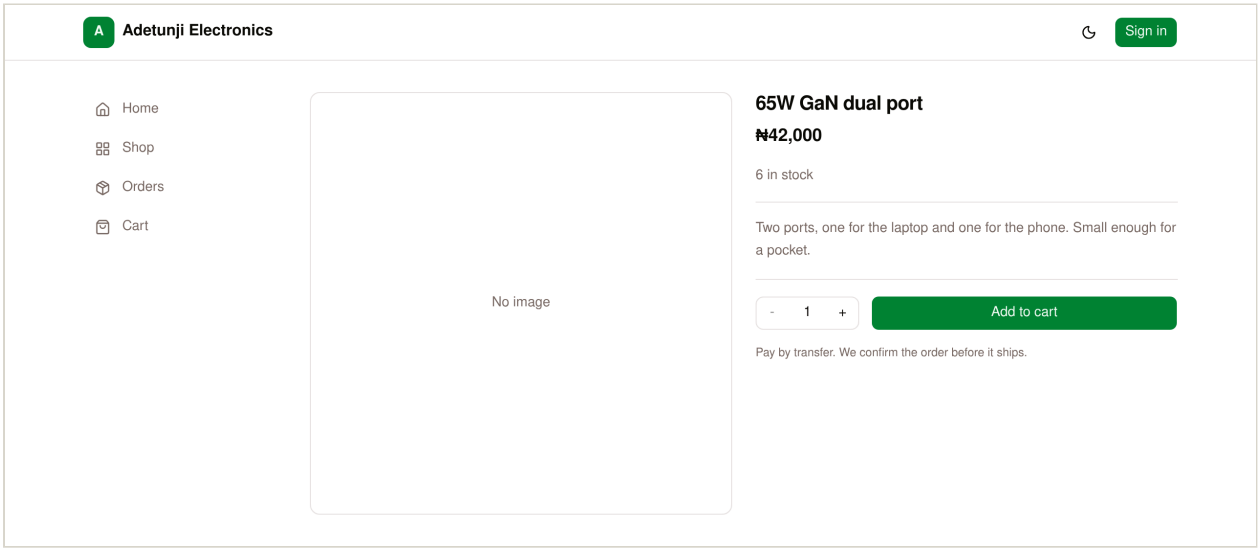


Figure A7. Product detail (`/products/4`). The quantity stepper is capped at the stock count, and "Add to cart" becomes "Sold out" at zero.

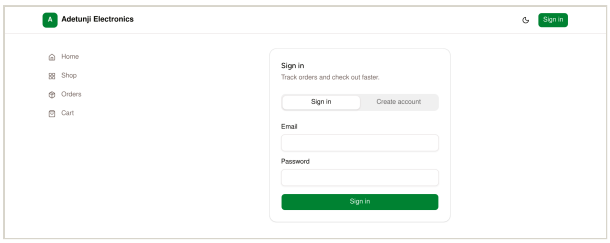


Figure A8. Sign in (`/login`). One form serves customers and the owner.

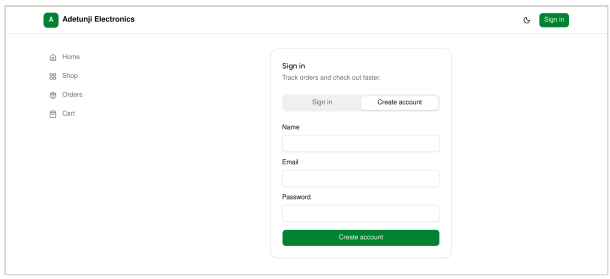


Figure A9. Create account tab: name, email, and a password of at least 8 characters.

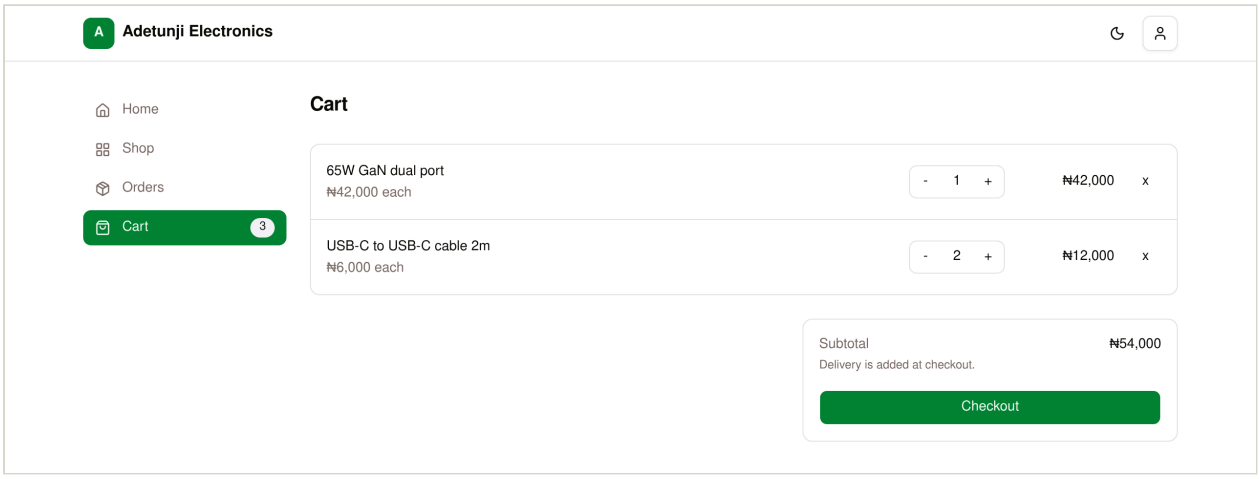


Figure A10. Cart (`/cart`). Lines and subtotal come from browser storage. The prices shown here are display-only: the server re-prices every order.

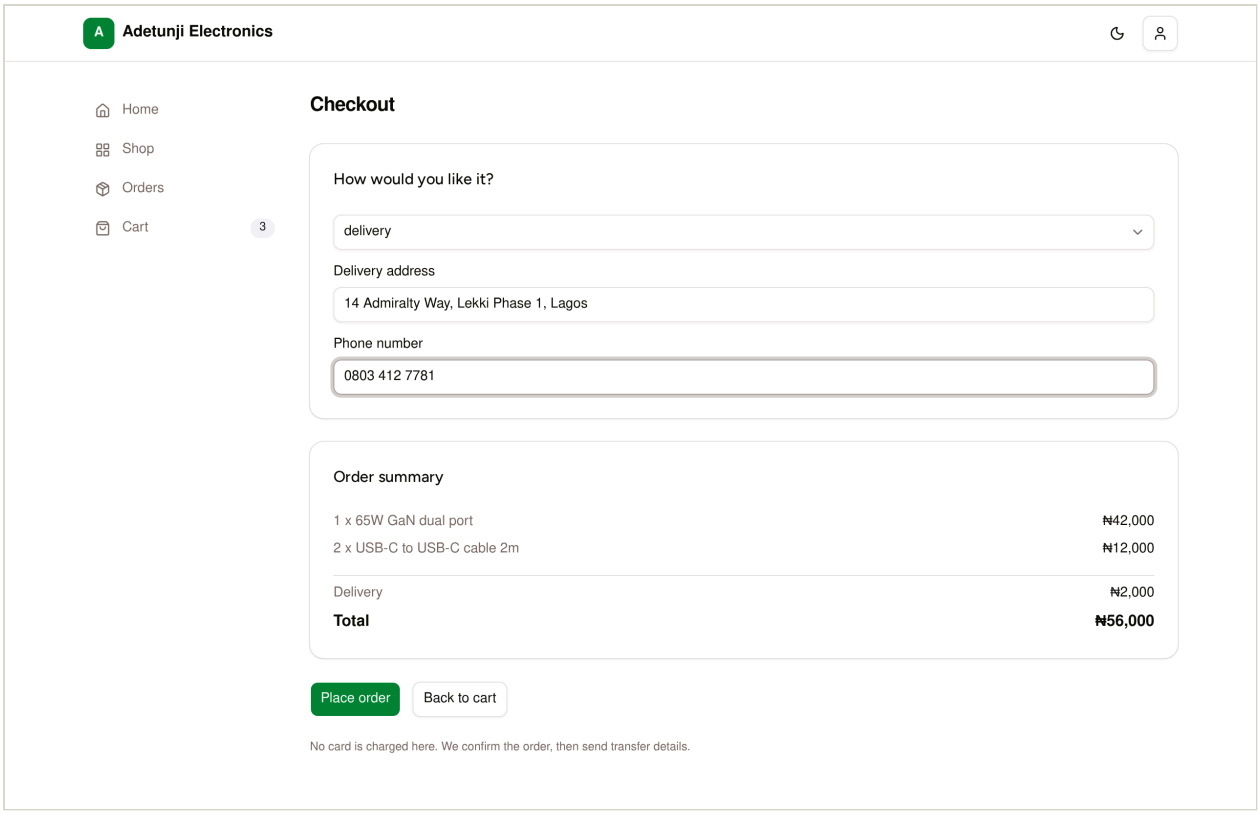


Figure A11. Checkout (`/checkout`) for delivery to Lekki Phase 1, Lagos, with the ₦2,000 delivery fee added. The select shows the raw value "delivery" rather than its label, a minor UI quirk.

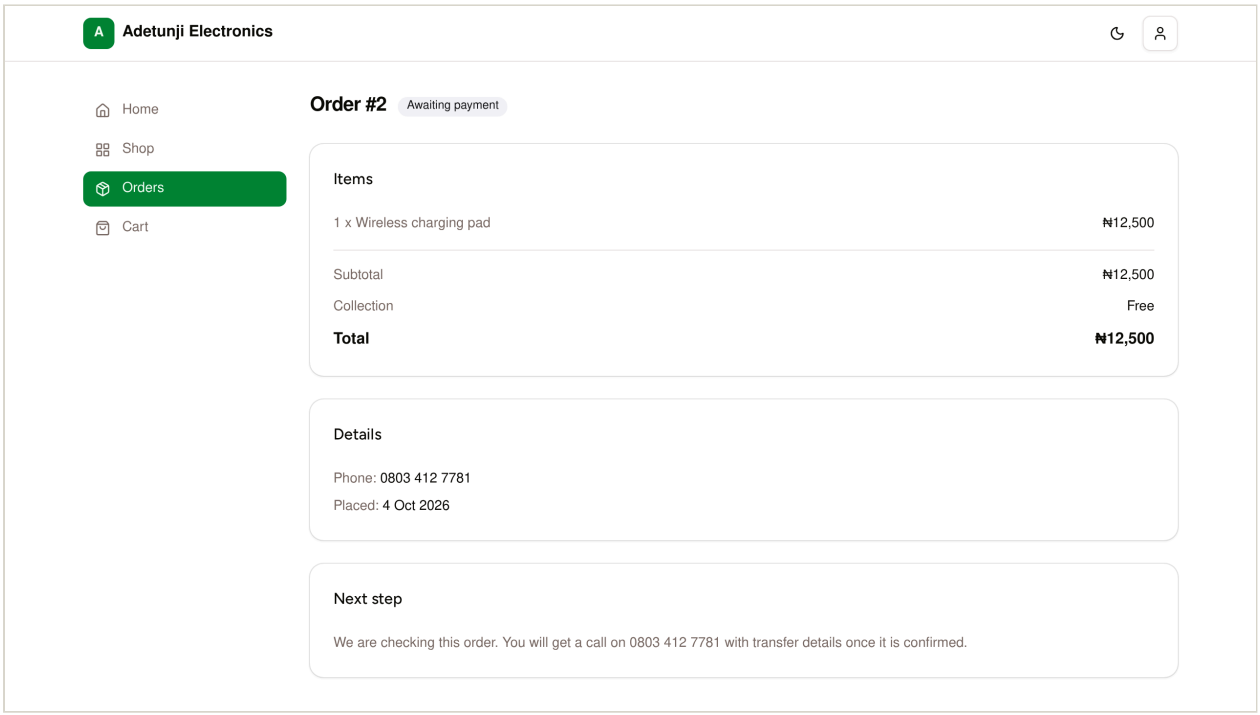


Figure A12. Order detail for a pending collection order (#2). The "Next step" panel appears only while the status is `pending` and tells the customer to expect a call with transfer details.

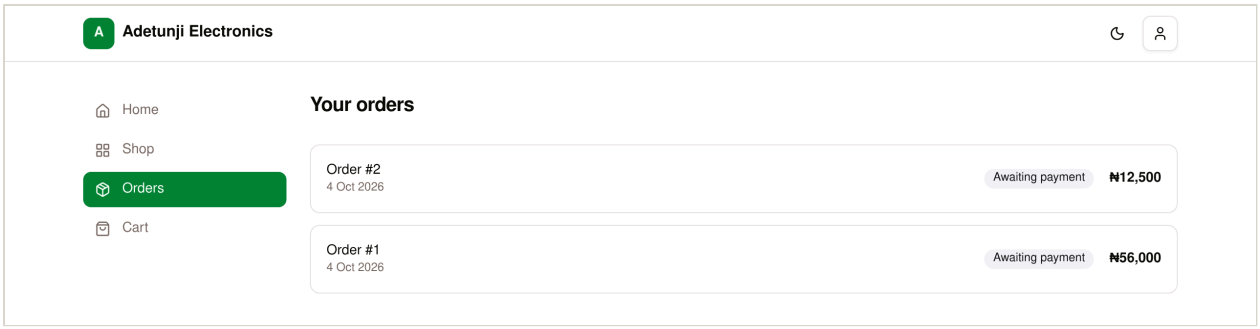


Figure A13. Order history (`/orders`) for Chidinma Okafor, newest first, with a status badge for each order.

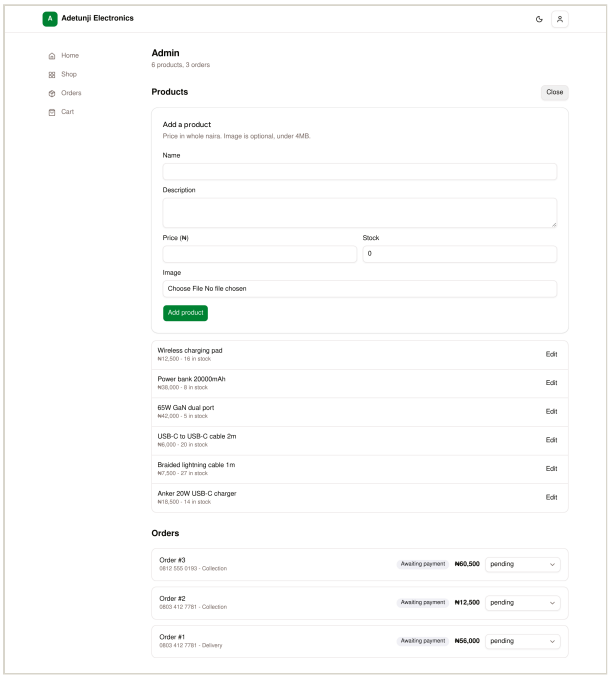


Figure A14. Add product form: name, description, price (whole ₦), stock and optional image.

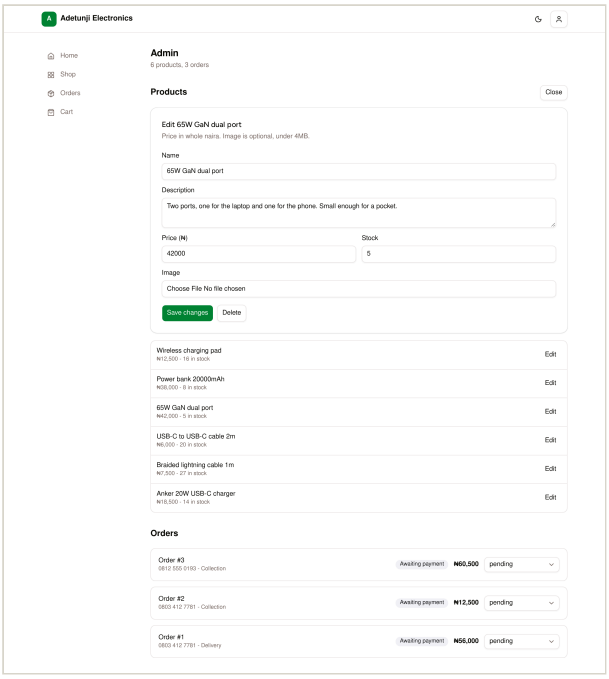


Figure A15. The same form in edit mode for the 65W GaN dual port, with Delete.

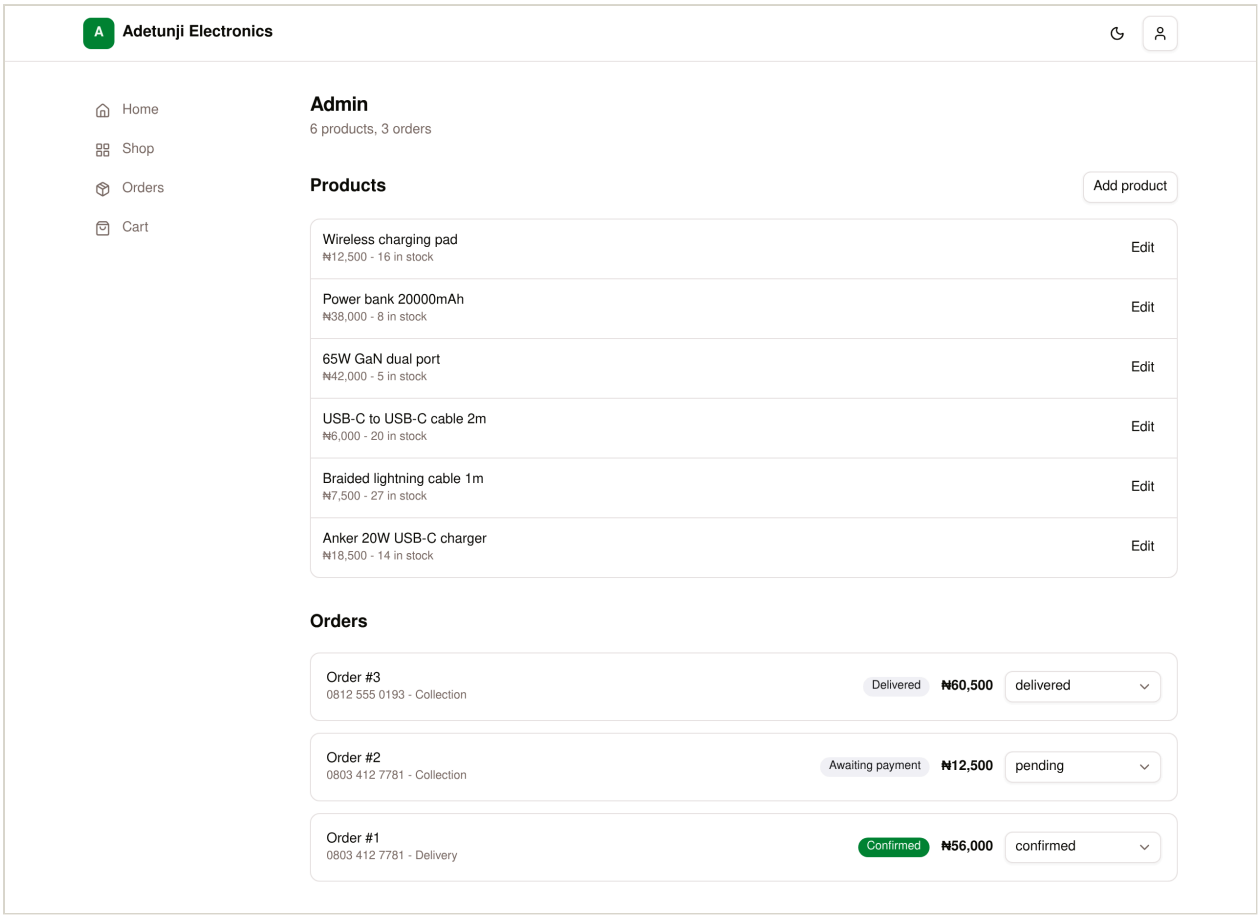


Figure A16. Admin after the owner recorded a transfer (#1 → confirmed) and a collection (#3 → delivered). Stock now reflects the three orders.

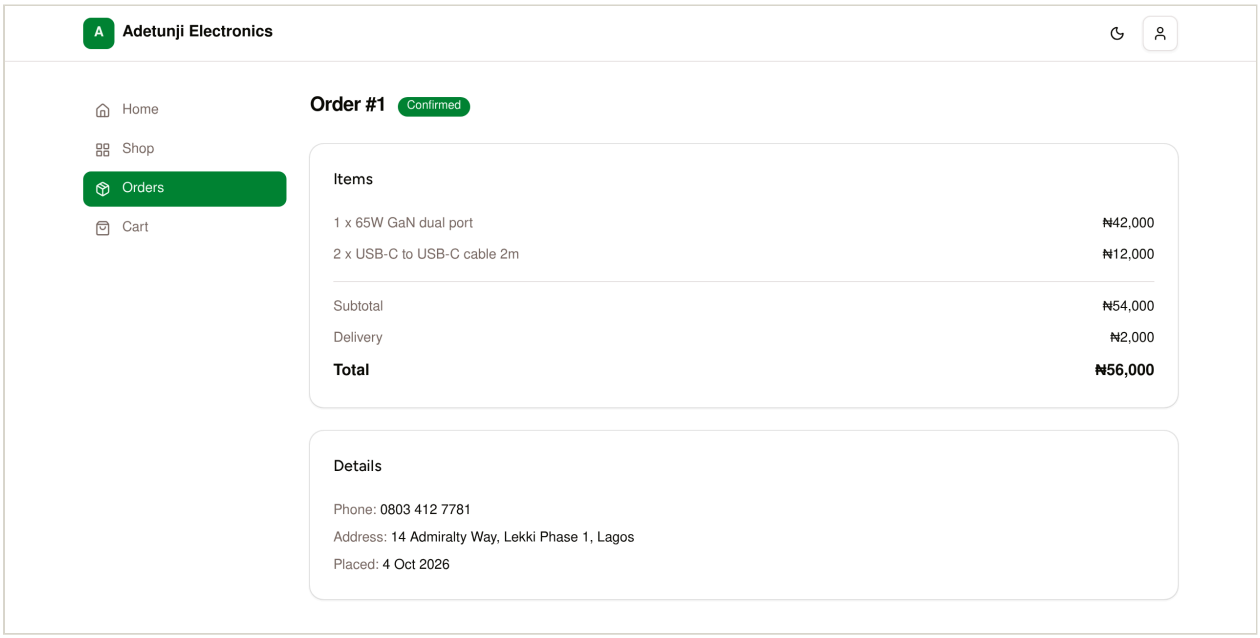


Figure A17. The customer's view of order #1 after confirmation. The line prices come from the snapshot in `order_items`, not from the current product price.

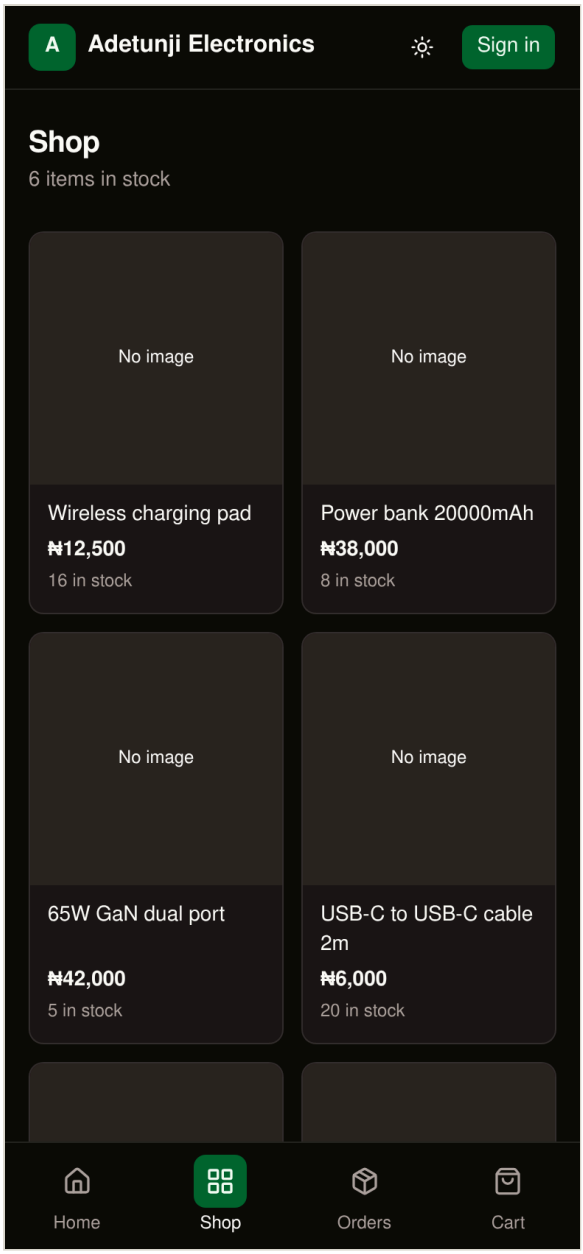


Figure A18. The shop at phone width (390 px) in dark mode. The side navigation becomes a bottom tab bar.

A.8 Source code listing

A.8.1 Database schema

SRC/LIB/DB/SCHEMA.TS · THE SCHEMA STRING, APPLIED ON EVERY CONNECTION

```
CREATE TABLE IF NOT EXISTS users (
  id            INTEGER PRIMARY KEY AUTOINCREMENT,
  email         TEXT    NOT NULL UNIQUE,
  name          TEXT    NOT NULL,
  password_hash TEXT    NOT NULL,
  is_admin      INTEGER NOT NULL DEFAULT 0,
  created_at    TEXT    NOT NULL DEFAULT (datetime('now'))
);

CREATE TABLE IF NOT EXISTS sessions (
  token      TEXT    PRIMARY KEY,
  user_id    INTEGER NOT NULL REFERENCES users(id) ON DELETE CASCADE,
  created_at TEXT    NOT NULL DEFAULT (datetime('now')),
  expires_at TEXT    NOT NULL
);
CREATE INDEX IF NOT EXISTS idx_sessions_user ON sessions(user_id);
CREATE INDEX IF NOT EXISTS idx_sessions_expiry ON sessions(expires_at);

CREATE TABLE IF NOT EXISTS products (
  id          INTEGER PRIMARY KEY AUTOINCREMENT,
  name        TEXT    NOT NULL,
  description TEXT    NOT NULL DEFAULT '',
  price       INTEGER NOT NULL,
  stock       INTEGER NOT NULL DEFAULT 0,
  image_path  TEXT,
  created_at  TEXT    NOT NULL DEFAULT (datetime('now'))
);

CREATE TABLE IF NOT EXISTS orders (
  id            INTEGER PRIMARY KEY AUTOINCREMENT,
  user_id       INTEGER NOT NULL REFERENCES users(id),
  -- 'pending' | 'confirmed' | 'delivered' | 'cancelled'
  status        TEXT    NOT NULL DEFAULT 'pending',
  -- 'delivery' | 'pickup'
  fulfilment    TEXT    NOT NULL,
  address       TEXT,
  phone         TEXT    NOT NULL,
  subtotal      INTEGER NOT NULL,
  delivery_fee  INTEGER NOT NULL DEFAULT 0,
  total         INTEGER NOT NULL,
  created_at    TEXT    NOT NULL DEFAULT (datetime('now'))
);
CREATE INDEX IF NOT EXISTS idx_orders_user ON orders(user_id);

CREATE TABLE IF NOT EXISTS order_items (
  id         INTEGER PRIMARY KEY AUTOINCREMENT,
  order_id   INTEGER NOT NULL REFERENCES orders(id) ON DELETE CASCADE,
  product_id INTEGER NOT NULL REFERENCES products(id),
  -- Name and price are copied at purchase time so history stays correct
  -- if the product is later renamed or repriced.
  name       TEXT    NOT NULL,
  price      INTEGER NOT NULL,
  qty        INTEGER NOT NULL
```

```
))
);

CREATETABLE IF NOTEXISTS sessions (
  token      TEXT    PRIMARY KEY,
  user_id    INTEGERNOTNULLREFERENCES users(id) ONDELETE CASCADE,
  created_at TEXT    NOTNULLDEFAULT (datetime('now')),
  expires_at TEXT    NOTNULL
);
CREATE INDEX IF NOTEXISTS idx_sessions_user ON sessions(user_id);
CREATE INDEX IF NOTEXISTS idx_sessions_expiry ON sessions(expires_at);

CREATETABLE IF NOTEXISTS products (
  id          INTEGERPRIMARY KEY AUTOINCREMENT,
  name        TEXT    NOTNULL,
  description TEXT    NOTNULLDEFAULT'',
  price       INTEGERNOTNULL,
  stock       INTEGERNOTNULLDEFAULT0,
  image_path  TEXT,
  created_at  TEXT    NOTNULLDEFAULT (datetime('now'))
);

CREATETABLE IF NOTEXISTS orders (
  id           INTEGERPRIMARY KEY AUTOINCREMENT,
  user_id      INTEGERNOTNULLREFERENCES users(id),
  -- 'pending' | 'confirmed' | 'delivered' | 'cancelled'
  status       TEXT    NOTNULLDEFAULT'pending',
  -- 'delivery' | 'pickup'
  fulfilment   TEXT    NOTNULL,
  address      TEXT,
  phone        TEXT    NOTNULL,
  subtotal     INTEGERNOTNULL,
  delivery_fee INTEGERNOTNULLDEFAULT0,
  total        INTEGERNOTNULL,
  created_at   TEXT    NOTNULLDEFAULT (datetime('now'))
);
CREATE INDEX IF NOTEXISTS idx_orders_user ON orders(user_id);

CREATETABLE IF NOTEXISTS order_items (
  id         INTEGERPRIMARY KEY AUTOINCREMENT,
  order_id   INTEGERNOTNULLREFERENCES orders(id) ONDELETE CASCADE,
  product_id INTEGERNOTNULLREFERENCES products(id),
  -- Name and price are copied at purchase time so history stays correct-- if the product is later
renamed or repriced.
  name       TEXT    NOTNULL,
  price      INTEGERNOTNULL,
  qty        INTEGERNOTNULL
);
CREATE INDEX IF NOTEXISTS idx_order_items_order ON order_items(order_id);
```

A.8.2 `createOrder`: the transactional core

SRC/LIB/ORDERS-DATA.TS · LINES 6–115

```
export const DELIVERY_FEE = 2000;

/** Caps a single product line so a request cannot create unbounded rows. */
const MAX_QTY_PER_LINE = 50;

export function createOrder(input: {
  userId: number;
  fulfilment: Fulfilment;
```

```
phone: string;
  items: { productId: number; qty: number }[];
}): number {
  db().exec("BEGIN");
  try {
    // Merge duplicate lines before anything else. A request can contain the// same product many
times, and each line would otherwise be validated// against the same pre-decrement stock reading,
overselling the item.const wanted = newMap<number, number>();
    for (const item of input.items) {
      if (!Number.isInteger(item.qty) || item.qty < 1) {
        thrownewError("Quantity must be a whole number of at least 1.");
      }
      if (item.qty > MAX_QTY_PER_LINE) {
        thrownewError(`You can order at most ${MAX_QTY_PER_LINE} of one item.`);
      }
      wanted.set(item.productId, (wanted.get(item.productId) ?? 0) + item.qty);
    }

    constlines: { productId: number; name: string; price: number; qty: number }[] = [];

    for (const [productId, qty] of wanted) {
      if (qty > MAX_QTY_PER_LINE) {
        thrownewError(`You can order at most ${MAX_QTY_PER_LINE} of one item.`);
      }
      const product = one<{ id: number; name: string; price: number; stock: number }>(
        "SELECT id, name, price, stock FROM products WHERE id = ?",
        productId,
      );
      if (!product) thrownewError("One of the items is no longer available.");
      if (product.stock < qty) thrownewError(`Not enough stock for ${product.name}`);

      lines.push({ productId: product.id, name: product.name, price: product.price, qty });
    }

    const subtotal = lines.reduce((n, i) => n + i.price * i.qty, 0);
    const deliveryFee = input.fulfilment === "delivery" ? DELIVERY_FEE : 0;
    const total = subtotal + deliveryFee;

    const r = run(
      `INSERT INTO orders (user_id, status, fulfilment, address, phone, subtotal, delivery_fee,
total)
       VALUES (?, 'pending', ?, ?, ?, ?, ?, ?)`,
      input.userId, input.fulfilment, input.address, input.phone, subtotal, deliveryFee, total,
    );
    const orderId = Number(r.lastInsertRowid);

    for (const item of lines) {
      run(
        "INSERT INTO order_items (order_id, product_id, name, price, qty) VALUES (?, ?, ?, ?, ?)",
        orderId, item.productId, item.name, item.price, item.qty,
      );
      // The stock >= qty guard makes negative stock impossible at the database// level, so a future
path that skips validation still cannot oversell.const res = run(
        "UPDATE products SET stock = stock - ? WHERE id = ? AND stock >= ?",
        item.qty, item.productId, item.qty,
      );
      if (res.changes !== 1) thrownewError(`Not enough stock for ${item.name}`);
    }

    db().exec("COMMIT");
    return orderId;
  } catch (err) {
    db().exec("ROLLBACK");
```

```
}
}
```

Some argument lists are joined onto single lines here to save space. The logic and statements match the file.

A.8.3 `saveImage`: content-based upload validation

SRC/LIB/ADMIN-API.TS · LINES 15–69

```
type Format = { ext: string; matches: (b: Buffer) => boolean };

const ALLOWED: Format[] = [
  { ext: ".jpg",  matches: (b) => b.length > 3 && b[0] === 0xff && b[1] === 0xd8 && b[2] === 0xff },
  { ext: ".png",  matches: (b) => b.length > 8 && b[0] === 0x89 && b[1] === 0x50 && b[2] === 0x4e &&
b[3] === 0x47 },
  { ext: ".webp", matches: (b) => b.length > 12 &&
      b.subarray(0, 4).toString("ascii") === "RIFF" && b.subarray(8, 12).toString("ascii") ===
"WEBP" },
  { ext: ".avif", matches: (b) => b.length > 12 &&
      b.subarray(4, 8).toString("ascii") === "ftyp" && b.subarray(8,
12).toString("ascii").startsWith("avi") },
];

export const MAX_UPLOAD_BYTES = 4 * 1024 * 1024;

async function saveImage(file: FormDataEntryValue | null): Promise<string | null> {
  if (!(file instanceof File) || file.size === 0) return null;
  if (file.size > MAX_UPLOAD_BYTES) throw new Error("Image must be under 4MB.");

  const bytes = Buffer.from(await file.arrayBuffer());
  const format = ALLOWED.find((f) => f.matches(bytes));
  if (!format) throw new Error("That file is not a JPG, PNG, WebP, or AVIF image.");

  await mkdir(UPLOAD_DIR, { recursive: true });
  const name = `${Date.now()}-${Math.random().toString(36).slice(2, 8)}${format.ext}`;
  await writeFile(join(UPLOAD_DIR, name), bytes);
  return `/uploads/${name}`;
}
```

PART B

Database Management

The database engine, the schema and why it is shaped the way it is, the queries the application actually runs, and how they replace the shop's manual records.

B.1	The DBMS and why it fits
B.2	Database design and ER diagram
B.3	Normalization
B.4	Queries written
B.5	Forms and reports
B.6	Automating the shop's record-keeping

B.1 The DBMS and why it fits

The store uses **SQLite 3.50.4** through `node:sqlite`, the SQLite binding built into Node.js (24.7 was used here; the README asks for 22.5 or newer). The database is a single file, `data/store.db`, opened once per process with `DatabaseSync` and cached on `globalThis` so dev-server reloads do not leak handles.

Two pragmas are set on every connection:

- `journal_mode = WAL`. Readers do not block the writer, so customers can keep browsing while an order commits.
- `foreign_keys = ON`. SQLite leaves foreign keys off by default. Here they are enforced, which is what makes deleting a product that appears in a past order fail. The admin page turns that failure into the message "Set its stock to 0 to retire it."

Why SQLite fits this deployment

PROPERTY OF THE SHOP	CONSEQUENCE FOR THE DBMS CHOICE
One shop, one server, one process	There is no second application server that needs network access to the data. An embedded engine skips a database server, its credentials and its network port.
Low write volume (orders arrive one at a time)	SQLite allows one writer at a time. For a small shop, writes take milliseconds and never queue in practice.
Run by a shop owner, not a DBA	No service to install, tune or upgrade. Backup is a file copy (§A.6.4).
Correctness matters more than scale	Full ACID transactions, foreign keys and `UNIQUE` constraints: everything `createOrder` relies on.
Built-in to the runtime	No native npm driver to compile, so `npm ci` on a fresh VPS is enough.

The README states the trade-off plainly: this is *"built for a single VPS or home server, not serverless, because the database is a local file."* Running several app servers behind a load balancer would mean moving to a client–server DBMS such as PostgreSQL. The plain SQL used throughout would carry over with few changes.

B.2 Database design and ER diagram

Five tables. Two describe people and their logins (`users`, `sessions`), one the catalogue (`products`), and two the sales ledger (`orders`, `order_items`). All keys are integer surrogates except `sessions.token`, a random 64-character hex string that is itself the secret.

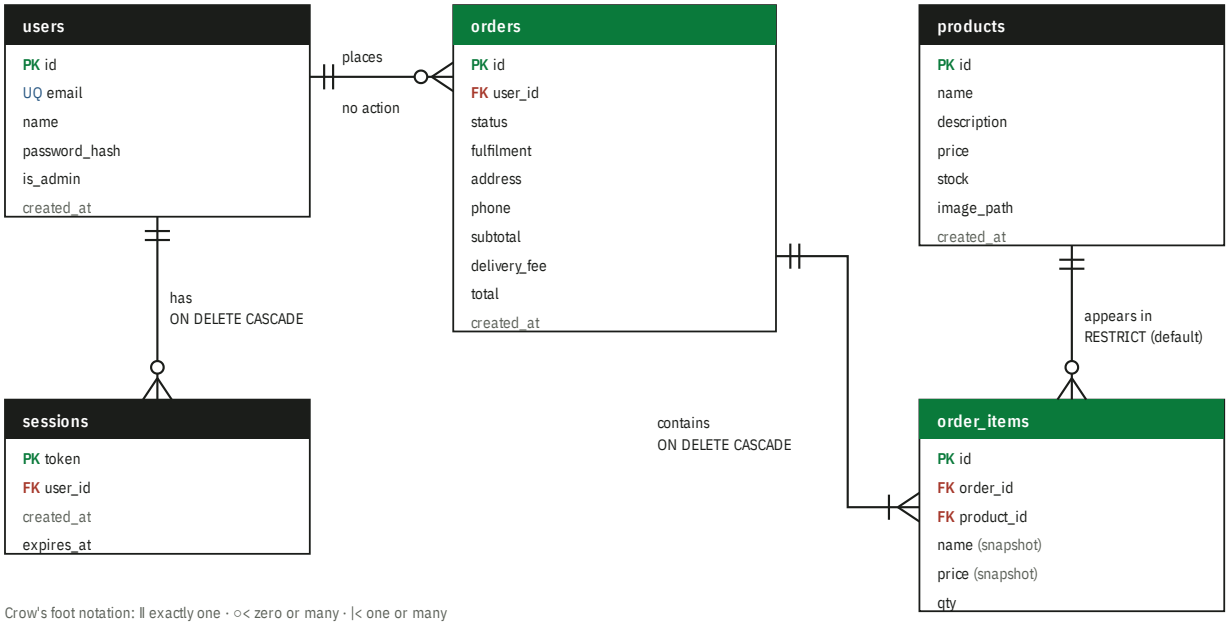


Figure B1. Entity–relationship diagram, drawn from `schema.ts`. Green headers mark the sales ledger. A user may have no orders and no sessions (○<). An order always has at least one line, because checkout rejects an empty cart (`items.min(1)`), so that end is drawn |<. The rule is enforced by the application, not by the schema.

B.2.1 Data dictionary

COLUMN	TYPE	CONSTRAINT	MEANING
users: one row per account			
`email`	TEXT	NOT NULL UNIQUE	Login identifier, lower-cased and trimmed before insert and lookup
`password_hash`	TEXT	NOT NULL	`salt:hash`, both hex: scrypt with a 16-byte salt and 64-byte key
`is_admin`	INTEGER	DEFAULT 0	1 for the shop owner. The only distinction between roles.
sessions: one row per signed-in browser			
`token`	TEXT	PRIMARY KEY	32 random bytes as hex. Also the cookie value.
`expires_at`	TEXT	NOT NULL, indexed	ISO-8601 timestamp, 30 days after sign-in
products: the catalogue			
`price`	INTEGER	NOT NULL	Whole naira, e.g. 42000 = ₦42,000

`stock`	INTEGER	DEFAULT 0	Units on the shelf. Reduced by `createOrder`, set by the admin form.
`image_path`	TEXT	nullable	`/uploads/<file>` or NULL for "No image"
orders: one row per checkout			
`status`	TEXT	DEFAULT 'pending'	pending · confirmed · delivered · cancelled (checked in the app, not by a CHECK constraint)
`fulfilment`	TEXT	NOT NULL	delivery · pickup
`address`	TEXT	nullable	Required by the app for delivery, stored NULL for pickup
`subtotal`, `delivery_fee`, `total`	INTEGER	NOT NULL	Amounts in naira, fixed at the moment of sale
order_items: one row per product per order			
`name`, `price`	TEXT, INTEGER	NOT NULL	Copied from `products` at purchase
`qty`	INTEGER	NOT NULL	1–50, after merging duplicates

B.3 Normalization

Checked one normal form at a time, using the functional dependencies the application relies on:

FIRST NORMAL FORM

Every column holds a single value: no comma lists, arrays or JSON blobs. A cart with several products becomes several `order_items` rows, not a list in one column. `address` is one free-text field. That is atomic for this shop's purposes, since nothing queries by street or city.

SECOND NORMAL FORM

Every table has a single-column primary key, so no non-key column can depend on only part of a key. 2NF follows from 1NF. A design keyed on `(order_id, product_id)` would have had to be checked here. The surrogate `id` avoids the question, and duplicate products within an order are merged in code before the insert.

THIRD NORMAL FORM, AND THREE DELIBERATE EXCEPTIONS

`users`, `sessions` and `products` have no transitive dependencies. In the sales ledger, three columns could in principle be derived from others. Each is stored on purpose, because the ledger has to record *what was true at the time of sale*:

COLUMN	COULD BE DERIVED FROM	WHY IT IS STORED ANYWAY
`order_items.name`, `order_items.price`	`products.name`, `products.price` via `product_id`	The schema comment says it directly: so that "history stays correct if the product is later renamed or repriced." Products can be edited freely in the admin form. Without the snapshot, repricing the 65W charger would silently change the value of every past order containing it.
`orders.subtotal`	Σ `order_items.price × qty`	A fixed record of the amount the customer was asked to transfer. A reconciliation query (Q10) confirms the stored and recomputed values agree for all three orders.
`orders.delivery_fee`, `orders.total`	`fulfilment` and the `DELIVERY_FEE` constant	The fee is a code constant (₦2,000). If it changes, existing orders must keep the fee they were charged.

Strictly, this means the ledger tables are in 2NF, with controlled redundancy that turns them into an immutable historical record. That is the standard treatment of invoice and order lines. The redundancy is written once, inside the `createOrder` transaction, and never updated afterwards, so it cannot fall out of sync through an update anomaly.

INTEGRITY ENFORCED, AND WHERE

- **By the schema:** NOT NULL, the unique email, foreign keys (with `foreign_keys = ON`), CASCADE from users to sessions and from orders to order_items, and RESTRICT from products to order_items.
- **By the application only:** the four `status` values, the two `fulfilment` values, non-negative price and stock, quantity 1–50, and an address being required for delivery. Adding `CHECK` constraints for these would move them into the database (see Limitations).

B.4 Queries written

The application has no ORM. Its queries are hand-written SQL with `?` placeholders, run through three helpers in `lib/db/client.ts`: `one()` returns the first row, `all()` every row, and `run()` executes a write and returns `changes` and `lastInsertRowid`. Each entry below pairs the function the app calls with the SQL that actually reaches SQLite. Values are bound as parameters, never concatenated into the string, so none of these queries can be injected.

#	CODE CALL (FILE)	SQL EXECUTED
Q1	`listProducts()` products-data.ts:6 Shop, home, admin, product page	`SELECT id, name, description, price, stock, image_path FROM products ORDER BY id DESC`
Q2	`createProduct(input)` products-data.ts:19	`INSERT INTO products (name, description, price, stock, image_path) VALUES (?, ?, ?, ?, ?)`
Q3	`updateProduct(id, input)` products-data.ts:37	`UPDATE products SET name = ?, description = ?, price = ?, stock = ?, image_path = ? WHERE id = ?`
Q4	`deleteProduct(id)` products-data.ts:58	`DELETE FROM products WHERE id = ?` (fails with a FOREIGN KEY error if the product appears in any `order_items` row)

Q5	`createOrder(...)`, inside one transaction
	orders-data.ts:23-114
		`BEGIN;`
		`SELECT id, name, price, stock FROM products WHERE id = ?;` (per product)
		`INSERT INTO orders (user_id, status, fulfilment, address, phone, subtotal, delivery_fee, total) VALUES (?, 'pending', ?, ?, ?, ?, ?, ?);`
		`INSERT INTO order_items (order_id, product_id, name, price, qty) VALUES (?, ?, ?, ?, ?);`
		`UPDATE products SET stock = stock - ? WHERE id = ? AND stock >= ?;`
		`COMMIT;` or `ROLLBACK;`

Q6	`ordersForUser(userId)` orders-data.ts:117	`SELECT * FROM orders WHERE user_id = ? ORDER BY id DESC` (served by `idx_orders_user`)

Q7	`getOrder(id)` + `itemsForOrder(id)`
	orders-data.ts:121-127
		`SELECT * FROM orders WHERE id = ?`
		`SELECT * FROM order_items WHERE order_id = ? ORDER BY id`
		The caller then checks `order.user_id === user.id`.

Q8	`allOrders()` / `setOrderStatus()` orders-data.ts:129-135	`SELECT * FROM orders ORDER BY id DESC` `UPDATE orders SET status = ? WHERE id = ?`
Q9	`userForToken(token)` auth-data.ts:81 Every authenticated request	`SELECT u.id, u.email, u.name, u.is_admin, s.expires_at FROM sessions s JOIN users u ON u.id = s.user_id WHERE s.token = ?` About every 100th call: `DELETE FROM sessions WHERE expires_at < ?`

Q9a	`loginFn`, `registerFn`, `startSession`, `destroySession`
	auth-api.ts, auth-data.ts
		`SELECT id, password_hash FROM users WHERE email = ?`
		`SELECT COUNT(*) AS n FROM users` (first user becomes admin)
		`INSERT INTO users (email, name, password_hash, is_admin) VALUES (?, ?, ?, ?)`
		`INSERT INTO sessions (token, user_id, expires_at) VALUES (?, ?, ?)`
		`DELETE FROM sessions WHERE token = ?`

Q9b	`scripts/set-password.ts`	`UPDATE users SET password_hash = ? WHERE id = ?` `DELETE FROM sessions WHERE user_id = ?`

> **CODE OBSERVATION**
> `getProduct(id)` in `products-data.ts:12` (a `WHERE id = ?` lookup) is defined but never called. The product page's server function, `fetchProductFn`, loads the whole catalogue with Q1 and filters it in JavaScript (`listProducts().find(...)`, `store-actions.ts:44`). That is harmless with six products, but switching to `getProduct` would be the obvious fix as the catalogue grows.

B.4.1 Reporting queries over the same schema

The app has no reports page. The owner reads the admin list. The schema already supports the questions a shop owner asks, though. The queries below are **not in the codebase.** They were written for this documentation and run read-only against `data/store.db`, and the results shown are the real output.

Q10 · RECONCILE STORED SUBTOTAL AGAINST ITS LINES

```
SELECT o.id, o.subtotal, SUM(oi.price * oi.qty) AS recomputed
  FROM orders o JOIN order_items oi ON oi.order_id = o.id
 GROUP BY o.id;
-- 1 | 54000 | 54000     2 | 12500 | 12500     3 | 60500 | 60500
```

Q11 · VALUE OF ORDERS BY STATUS (WHAT IS OWED VS. RECEIVED)

```
SELECT status, COUNT(*) AS orders, SUM(total) AS value
  FROM orders GROUP BY status ORDER BY status;
-- confirmed | 1 | 56000     delivered | 1 | 60500     pending | 1 | 12500
```

Q12 · UNITS SOLD AND REVENUE PER PRODUCT, WITH STOCK ON HAND

```
SELECT p.name,
       COALESCE(SUM(oi.qty), 0)            AS units_sold,
       COALESCE(SUM(oi.qty * oi.price), 0) AS revenue,
       p.stock                             AS on_hand
  FROM products p LEFT JOIN order_items oi ON oi.product_id = p.id
 GROUP BY p.id ORDER BY revenue DESC;
```

PRODUCT	UNITS SOLD	REVENUE (₦)	ON HAND
65W GaN dual port	1	42,000	5
Power bank 20000mAh	1	38,000	8
Braided lightning cable 1m	3	22,500	27
Wireless charging pad	1	12,500	16
USB-C to USB-C cable 2m	2	12,000	20
Anker 20W USB-C charger	0	0	14

Q12 counts every order, including *pending* ones whose transfer has not arrived. Adding `JOIN orders o ON o.id = oi.order_id WHERE o.status IN ('confirmed','delivered')` limits it to paid sales.

B.5 Forms and reports

In database terms, a *form* is a screen that captures or changes records, and a *report* is a screen that presents records read back from the database. Each captured screen maps to one of those roles:

SCREEN (FIGURE)	ROLE	TABLES TOUCHED	RECORDS CAPTURED OR PRESENTED
Create account (A9)	**Form**	INSERT users, sessions	Name, email, password → hashed row and a new session
Sign in (A8)	**Form**	SELECT users · INSERT sessions	Credentials → session token in cookie
Product detail (A7)	Form (client)	SELECT products	Quantity into the browser cart. Not stored in the database until checkout.
Checkout (A11)	**Form**	INSERT orders, order_items · UPDATE products	Fulfilment, address, phone and lines → one order, its lines and the stock reduction
Add / edit product (A14, A15)	**Form**	INSERT / UPDATE / DELETE products	Catalogue maintenance and stock counts
Admin order status menu (A16)	**Form**	UPDATE orders	Records payment received (confirmed) and hand-over (delivered)
Shop and home (A5, A6)	**Report**	SELECT products	Public price list with live stock
Order history (A13)	**Report**	SELECT orders WHERE user_id	A customer's statement of orders, totals and status
Order detail (A12, A17)	**Report**	SELECT orders, order_items	An invoice-like breakdown using snapshot prices
Admin dashboard (A16)	**Report** + form	SELECT products, orders	Stock sheet and order book for the owner: "6 products, 3 orders"

B.6 Automating the shop's record-keeping

Without this system, Adetunji Electronics would keep three paper records: a **price list**, a **stock book** and an **order book** (who ordered what, where it goes, whether they have paid). The database replaces each one and links them, so one action updates all the records it affects. Following one real order from the sample data shows how.

One order, end to end

STEP	WHAT HAPPENED (REAL DATA)	RECORD WRITTEN AUTOMATICALLY
Customer orders	Chidinma Okafor orders 1 × 65W GaN dual port (₦42,000) and 2 × USB-C to USB-C cable 2m (₦6,000 each) for delivery to 14 Admiralty Way, Lekki Phase 1, Lagos, phone 0803 412 7781.	`orders` #1: subtotal 54000, delivery_fee 2000, total 56000, status pending. Two `order_items` rows with the names and prices at that moment.
Stock book updated	No one writes anything down.	`products.stock`: 65W GaN 6 → 5, USB-C cable 22 → 20, in the same transaction as the order.

Owner calls, customer transfers ₦56,000	The owner opens Admin and changes #1 to *confirmed*.	`orders.status = 'confirmed'`. The customer's page switches to a green "Confirmed" badge and the "expect a call" panel disappears.
Hand-over	Tunde Bakare collects his order (#3, ₦60,500: a power bank and 3 lightning cables). The owner marks it *delivered*.	`orders.status = 'delivered'`. Order #2 (₦12,500, collection) stays *pending*: still unpaid.

What the shop gains

- **No double-selling.** The stock check and decrement are atomic, so the fifth-from-last 65W charger cannot be promised to two people.
- **No disputed prices.** Every order line carries the price that was charged, whatever happens to the catalogue afterwards.
- **An accounts-receivable view for free.** Pending orders are exactly the transfers still to collect. In the sample data that is ₦12,500 across one order (Q11).
- **A customer contact record.** Each order keeps the phone number used for the confirmation call and, for delivery, the address. The customer can see the same record themselves.
- **A single, copyable archive.** The whole business record is `data/store.db`.

Known limitations and recommendations

Each item below was found by reading the code or running it. They are listed roughly in the order the shop would feel them.

LIMITATION	EVIDENCE	SUGGESTED CHANGE
Cancelling an order does not return its stock	`setOrderStatus` only runs `UPDATE orders SET status = ?`	When moving to `cancelled`, add the line quantities back to `products.stock` in one transaction
Any status can follow any status	`updateOrderStatusFn` checks membership of `STATUSES` only	Allow only pending → confirmed → delivered, plus → cancelled from pending or confirmed
No automated tests or CI	§A.5	Node's built-in test runner on `createOrder` and the auth functions with a temporary `DATA_DIR`. Run `npm run verify` in CI.
No rate limit on sign-in	`loginFn` has no attempt counter	Throttle attempts per email and per IP address
Domain rules only in application code	No CHECK constraints in the schema	`CHECK (status IN (…))`, `CHECK (fulfilment IN ('delivery','pickup'))`, `CHECK (price >= 0 AND stock >= 0)`, `CHECK (qty BETWEEN 1 AND 50)`
Product page loads the whole catalogue	`fetchProductFn` uses `listProducts().find`	Call the existing `getProduct(id)`
The README is out of date on the cookie `secure` flag and on backup scope	§A.6.4	State that HTTPS is required in production, and include `public/uploads` and the WAL file in backups
Checkout select shows a raw value	Figure A11 shows "delivery"	Render the item label in `SelectValue`